


PPC10MLS-3I

Minifront



- Anti glare protection glass
- Resistive Touchscreen

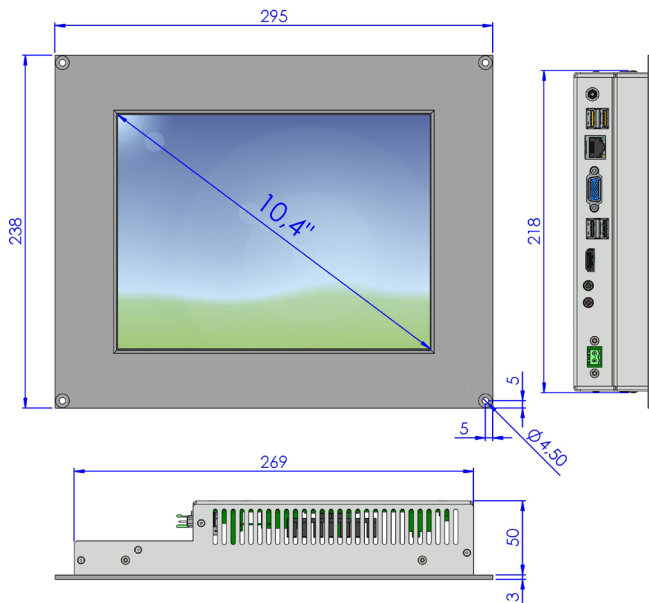

Specifications

LCD Panel

Display Type	10.4" TFT LCD
Resolution	800 x 600
<i>option</i>	1024 x 768
Colors	16.2M
Backlight	LED
Brightness	400cd/m ² (typ.)
Viewing Angle	160° H, 140° V (typ.)
<i>option</i>	176° H, 176° V (typ.)

PC System

Processor/ Memory	Intel® Celeron® J1900, 4x 2.0GHz up to 8GB RAM
Storage	Solid State Disk, up to 1TB
I/O Port	1x LAN 2x USB 2.0 more/ other I/O-Ports on request

Mechanical

Construction	Powder coated aluminium front panel, steel chassis
Color	RAL 9005, 7035, 7032, 9006, etc.
Front dimension	295 x 238 x 3 mm
Cover dimension	269 x 218 x 50 mm
Mounting	Panelmount 285 x 228, 4x Ø 4,5mm
Protection	IP41 on frontside
<i>option</i>	Anti glare protection glass (IP65 on frontside)

Electrical

Power Supply	12V DC
<i>option</i>	24V, 48V DC

Environmental

Temperature	operating 0°C to 45°C storage -20°C to 60°C
Humidity	max. 90% RH, non condensing

Options

Touchscreen, resistive	
Operating System	Microsoft® Windows® 7 Pro Microsoft® Windows® 10 Pro Microsoft® Windows® Embedded Linux®
AC adapter	
other options on request	

Accessories (included)

Power-cord

Intel®, Celeron®, Pentium®, Intel® Core™ and Intel® Atom™ are trademarks of the Intel Corporation in the U.S. and other countries. Microsoft® and Windows® are trademarks of the Microsoft® Corporation in the U.S. and other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Dimensions in mm

1A

All rights reserved. Specifications subject to change without prior notice

